



HALLMARK WINDOWS

Contemporary

Aluminium Bi-folding Doors



As seen on
Channel 4
Old House, New Home





Visually Stunning

Bi-folding doors are the ultimate way to transform your home. Not only are they visually stunning, they also utilise the latest technology to achieve outstanding weather performance and security.

If you're looking for that WOW factor, you're certainly looking at the right product. Bi-folding doors are becoming a popular solution to seamlessly merge your patio and garden with your living space to create a stunning addition to your home. Our low threshold option gives you the opportunity to create a flush opening to truly bring the outside, inside. The flush low threshold option isn't just stunning it's also practical for homes where wheelchair or even buggy access is required.

Bi-folding doors allow you to open up entire facades in your home and make the most out of an attractive garden or outside area. These beautifully designed, versatile doors are suitable wherever you want to transform your home; living room, bedroom, kitchen, conservatory, the choice is yours.



Enjoy, whatever the weather

Our bi-folding doors are made using the Visofold 1000 profile system, which utilises the latest polyamide thermal barrier technology. This advanced profile technology creates a thermal transmittance barrier between the cold outside and the warm inside keeping your home warm and comfortable even in the coldest weather.

Weatherproofing

Our aluminium doors are designed to give strength and durability to ensure a structurally sound product that requires minimal maintenance and delivers reliable performance over a lifetime of use.

Each door set carries 28mm double glazed argon-filled units incorporating softcoat toughened safety glass as standard. This naturally ensures that only a limited amount of heat escapes through the glass. The doors also come with multiple rubber seals and draught excluders helping to ensure that nothing but sunlight passes through the doors.

Open or closed

The contemporary aesthetics of our bi-folding doors will add a touch of finesse to any external aspect of your home. When closed, our bi-folding doors complement your home with a striking glass facade using attractive sculptured characteristics that are pleasing to the eye. During warmer weather you have the option to fold the sashes back to give a stunning opening that draws the exterior ambience into the comfort of your home.





Safe and Secure

One of the most important considerations when buying new windows and doors is security. Rest assured that our doors have some of the most effective locking systems available on modern bi-folding doors.



3 Point Locking System

The 3 point locking system, which is applied to all independently opening traffic doors has been accredited with 'PAS 24:2016' status.

ABS Master Cylinder

ABS is our standard cylinder fitted on all master doors. The cylinder is 3 star rated and approved by the Police security initiative "Secured by Design". On top of that, it's tested by the Master Locksmith Association, passing with the Sold Secure Diamond grade, which is recognised as the highest security standard UK locks can conform to.



PAS 24:2016 Upgrade

Upgrade the security of your bi-folding doors by taking advantage of our PAS 24:2016 security package. The upgrade includes laminated glass. This is generally mandatory on new-build projects.

Contemporary Features

Our aluminium bi-folding doors come with many different features and hardware options, many of which are available in a variety of different colours. The features have been designed with aesthetics and functionality in mind and the final door solution certainly reflects on this.



Stainless Steel Rollers

The doors glide on stainless steel rollers, which allows for unrestricted thoroughfares and maximum use of space and light. The smooth contours and curved clean lines create an attractive aesthetic that will compliment any home, whatever your taste and style.

Lever / Lever Handle

Our standard bi-folding door handle used on the traffic door is a lever/lever handle. The lever/lever handle is available in a variety of colours such as white, gold, chrome, satin chrome and black.



Intermediate Shootbolt

The intermediate shootbolt locking handle is located where two intermediate doors meet. To engage the locking mechanism the handle will point downwards. To open the door and to disengage the locking system, the handle will rotate about 180 degrees either clockwise or anticlockwise depending on how the door is hinged.

D-Handle Hinge

D-handles are used in conjunction with the intermediate shootbolt handle. They are found on the inside of the door and are integrated into the hinge, providing an easy hand-hold for pulling and sliding the doors open and closed.



Link Vent



Flush Vent

Trickle Vents

Choose between our flush trickle vent (white, grey or black only) or the link vent. A trickle vent is a small opening integrated into the door that allows for small amounts of ventilation. The installation of trickle vents is required to satisfy the building regulations Part F, means of ventilation.



Magnetic Catch


Our bi-folding doors also come with magnetic catches to ensure that when the traffic door is open the handle won't make contact with the second door and potentially cause damage. In addition it also means that you are able to leave the traffic door open without the fear of it being caught by the wind.

Integral Blinds

Our integral blinds are a no hassle alternative to curtains and internally hung blinds. With the blinds being hermetically sealed inside the glass unit, you never have to worry about getting your duster out again. The blinds come with the facility to slide up and down and tilt to reduce light if needed.



Integral Blinds Colour Options



The colours shown are designed as a guide only, before making your final decision, please ensure you have seen a blind swatch.



Colourways

From stock our bi-folding doors are available in white and grey. You also have the option of requesting dual colour e.g. grey on the outside and white on the inside. Other colours are available upon request but may be subject to a minimum order quantity. Please get in touch to discuss.



White
RAL 9010




Grey
RAL 7016




Black
RAL 9005

NEW Woodgrain Finishes

Our contemporary bi-folding doors are now available in a carefully selected range of authentic woodgrain finishes to match our traditional timber-alternative range of PVCu windows.



White



Cream



Grey



Agate
Grey



Chartwell
Green




Black



Irish Oak



Golden
Oak



Rosewood

Door Configurations

All door styles can open inside or outside and be either left or right handing.




Identifies traffic door with lever handle and 3* diamond high security cylinders.



Identifies intermediate doors with shoot-bolt handle (internal only, no external handle).

2 Panel Door

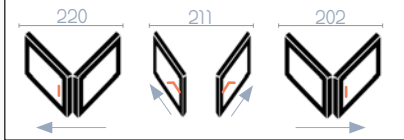

3 Panel Door




Configuration Code


4 Panel Door




5 Panel Door

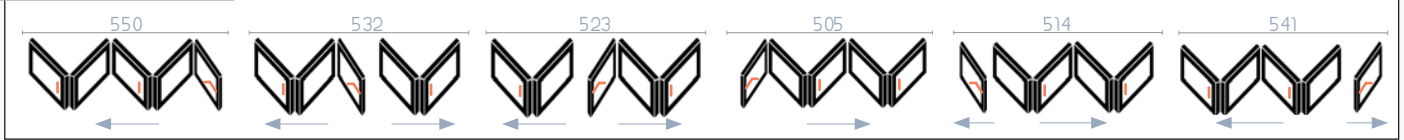


6 Panel Door

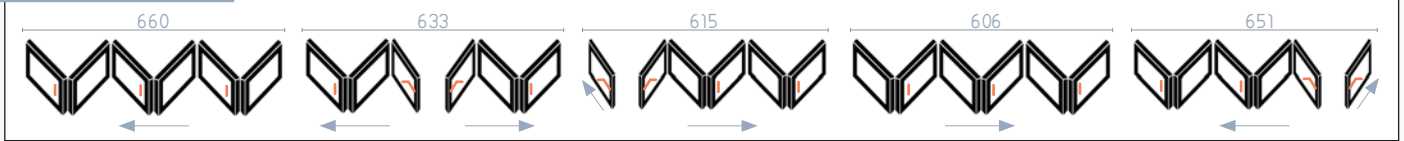

7 Panel Door

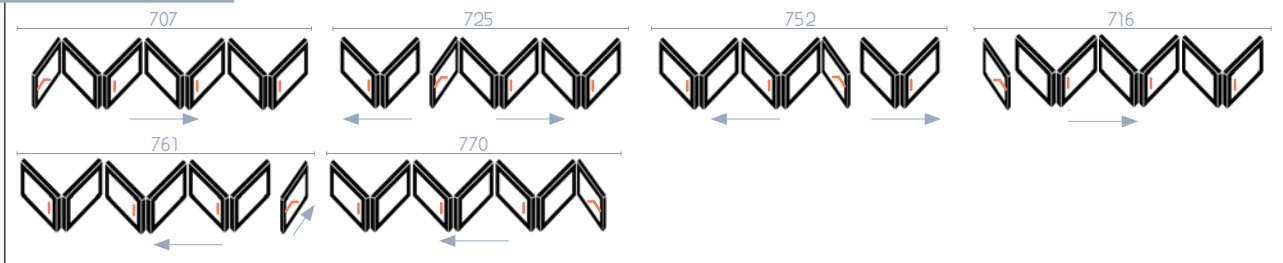

8 Panel Door

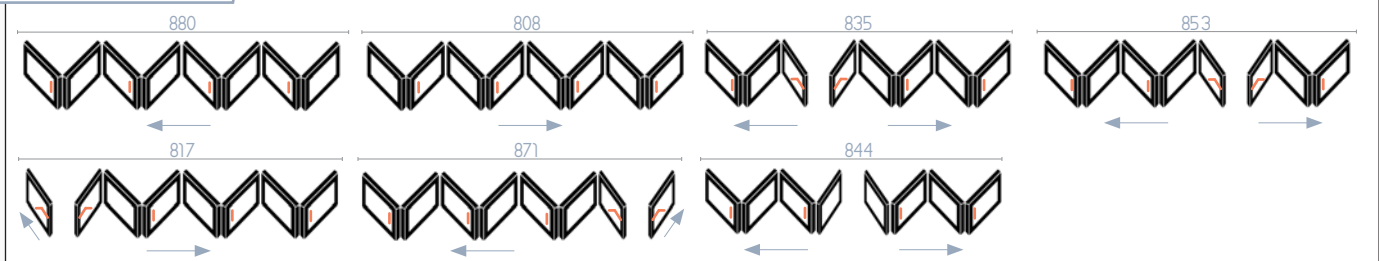

Technical Information

Our technical information section covers manufacturing limitations and detailed technical drawings. To most people the technical drawings don't make much sense, so if you have any questions our product experts will be more than happy to explain in more detail.

Technical Specifications


Profile depth: 70mm
 Typical sight line: 132mm
 Sill options: 85, 150, 190, 225mm
 Sill height: 25mm
 Glazing units: 28mm or 36mm (triple)
 U-value: 1.3W/m²K - 1.6W/m²K

Manufacturing Limitations


Minimum panel width: 550mm
 Maximum panel width: 1200mm
 Minimum panel height: 1200mm / 1750mm if levered handle is required
 Maximum panel height: 2500mm

Technical Drawings


Main frame



Curved Door Sash




Square Door Sash




Outer Frame


Sills




85mm Sill



150mm Sill




190mm Sill




225mm Sill


Ancillaries




Low Threshold



Threshold Ramp



42mm Frame Extension



20mm Frame Extension

Size restrictions may apply depending on glazing specification, site location and/or profile finish.



The images, drawings and data shown in this brochure are for illustrative purposes only and are not binding in detail, colour or specification. We reserve the right to make changes to the product specification as technical developments dictate and without prior notice.



HALLMARK WINDOWS

Head Office: 43 Durham Way, Harrogate, HG3 2TA
Showroom: Unit 2, Oak Beck Way, Harrogate, HG1 3HU

T: 01423 568660

info@hallmarkharrogate.co.uk
www.hallmarkharrogate.co.uk